





№ кривой	Обозначение вентилятора	Типоразмер двигателя	Параметры вентилятора в рабочей зоне		Прк, мин <sup>-1</sup>	Ну, кВт	Масса, кг не более
			Q, х103 м <sup>3</sup> /ч	PV, Па			
BP-231-26-2,5; электродвигатель 2 полюса (3000 мин <sup>-1</sup> )							
1	BP-231-26-2,5; 0,75/2880	5AI71A2	0,5...0,8	1630...1840	2880	0,75	21

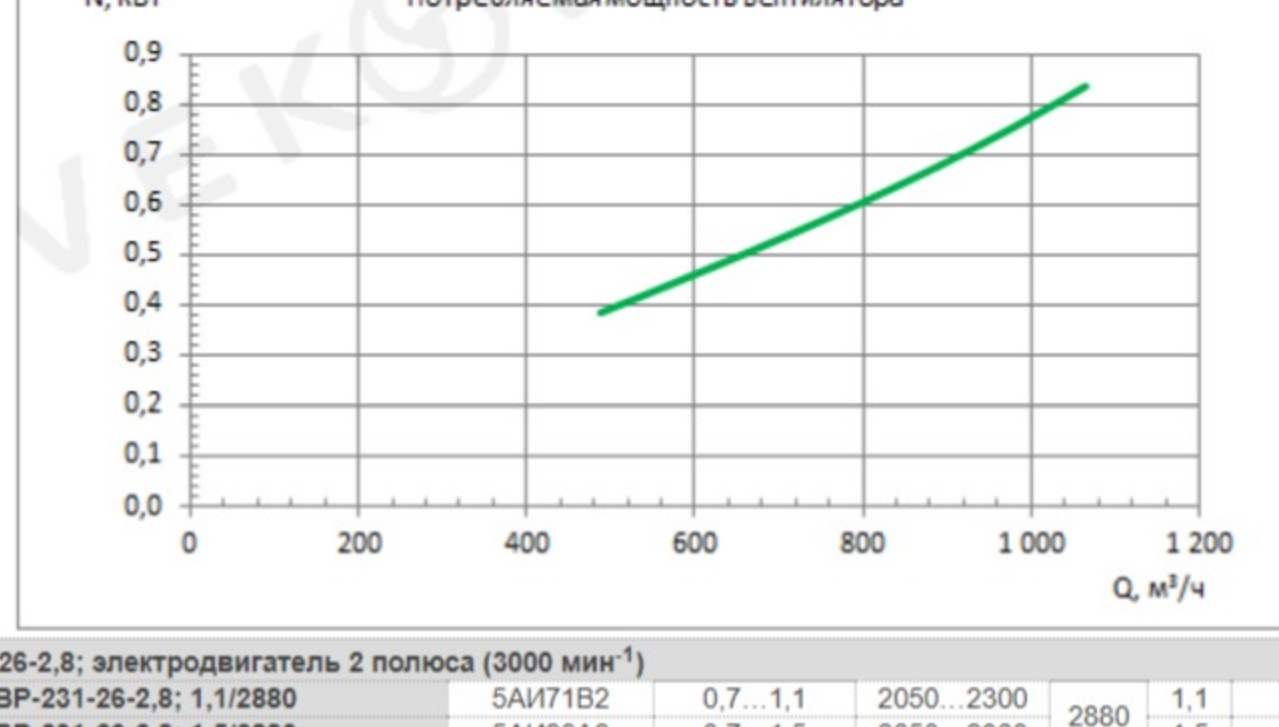


BP-231-26-2,8; электродвигатель 2 полюса (3000 мин <sup>-1</sup> )							
1	BP-231-26-2,8; 1,1/2880	5AI71B2	0,7...1,1	2050...2300	2880	1,1	25
2	BP-231-26-2,8; 1,5/2880	5AI71B2	0,7...1,5	2050...2300	2880	1,5	29

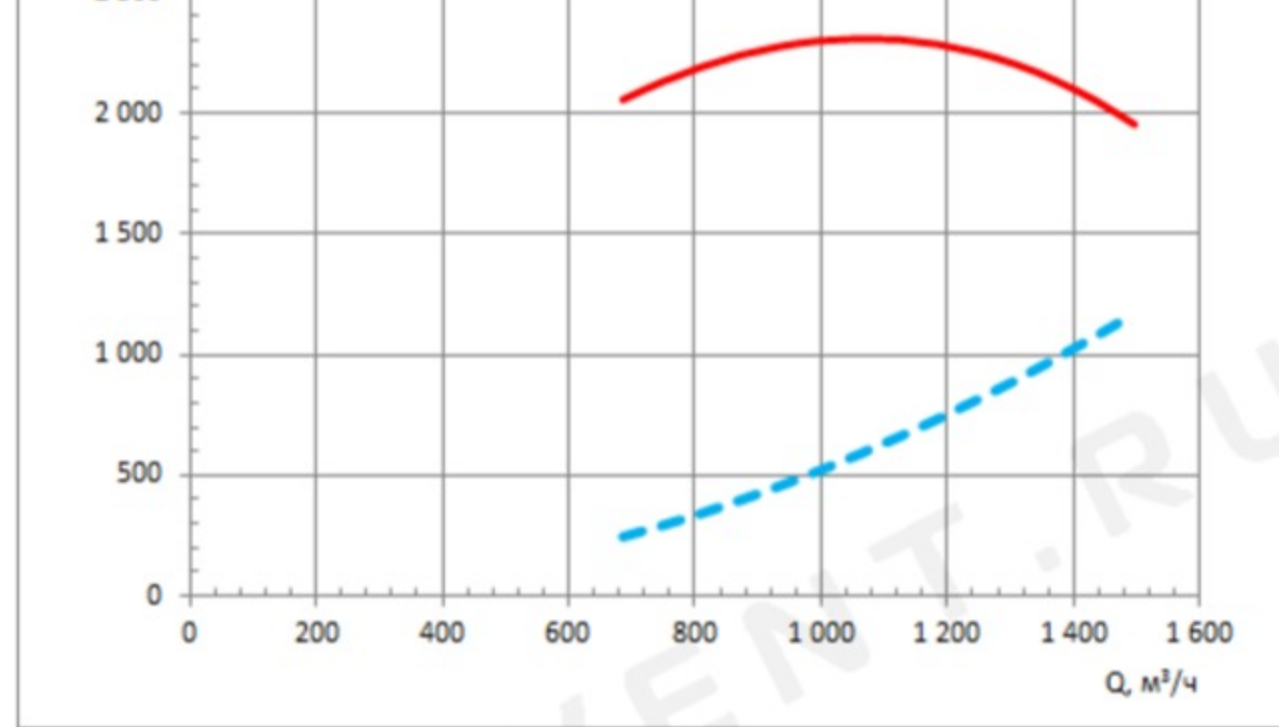



BP-231-26-3,15; электродвигатель 2 полюса (3000 мин <sup>-1</sup> )							
1	BP-231-26-3,15; 2,2/2900	5AI80B2	1,0...1,7	2630...2960	2900	2,2	39
2	BP-231-26-3,15; 3,0/2900	5AI90L2	1,0...2,2	2630...2960	2900	3,0	43

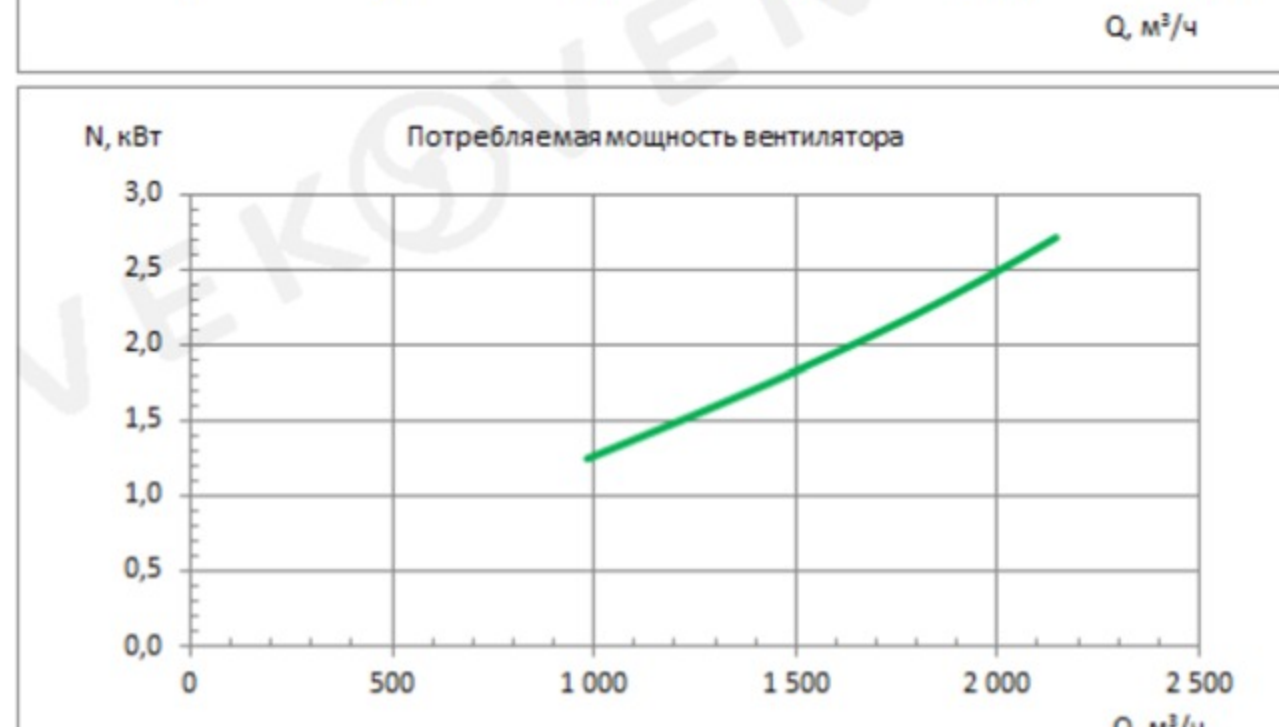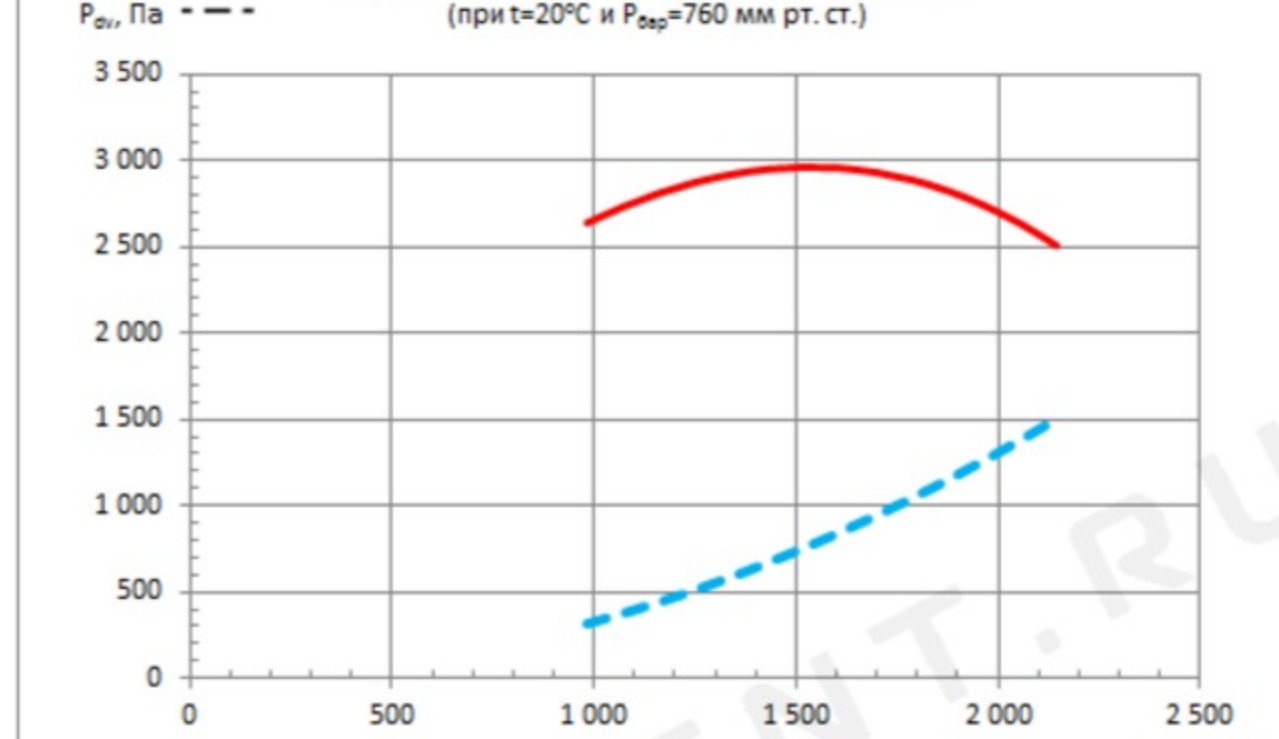


BP-231-26-3,55; электродвигатель 2 полюса (3000 мин <sup>-1</sup> )							
1	BP-231-26-3,55; 4,0/2900	5AI100S2	1,4...2,4	3350...3760	2900	4,0	56
2	BP-231-26-3,55; 5,5/2900	5AI100L2	1,4...3,1	3350...3760	2900	5,5	60

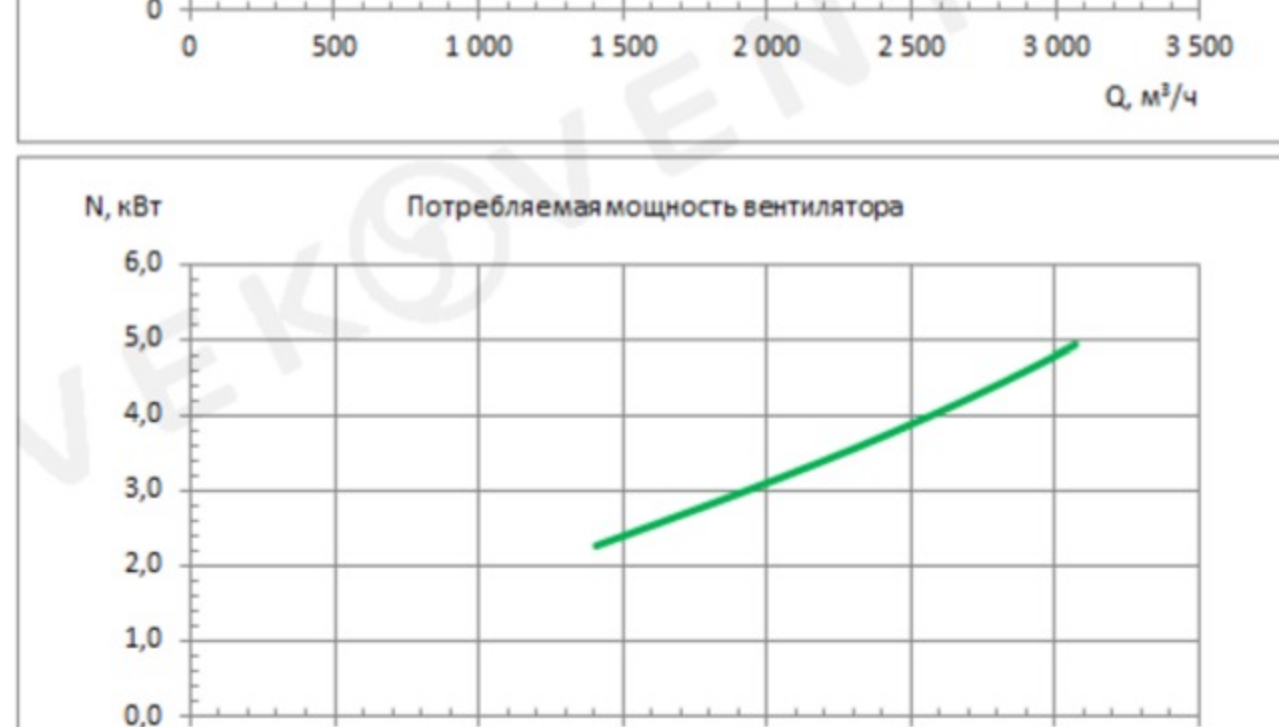

BP-231-26-4,0; электродвигатель 2 полюса (3000 мин <sup>-1</sup> )							
1	BP-231-26-4,0; 7,5/2920	5AI112M2	2,0...3,5	4310...4840	2920	7,5	91
2	BP-231-26-4,0; 11,0/2920	5AI113M2	2,0...4,4	4310...4840	2920	11,0	118

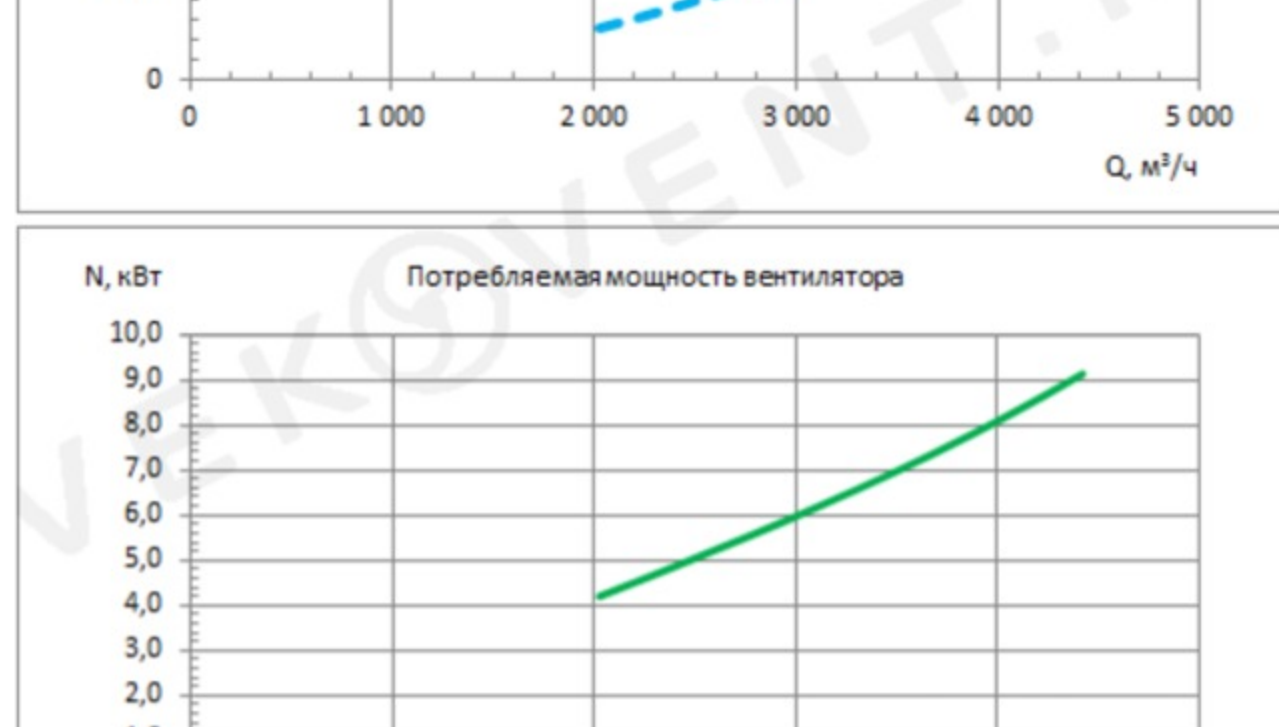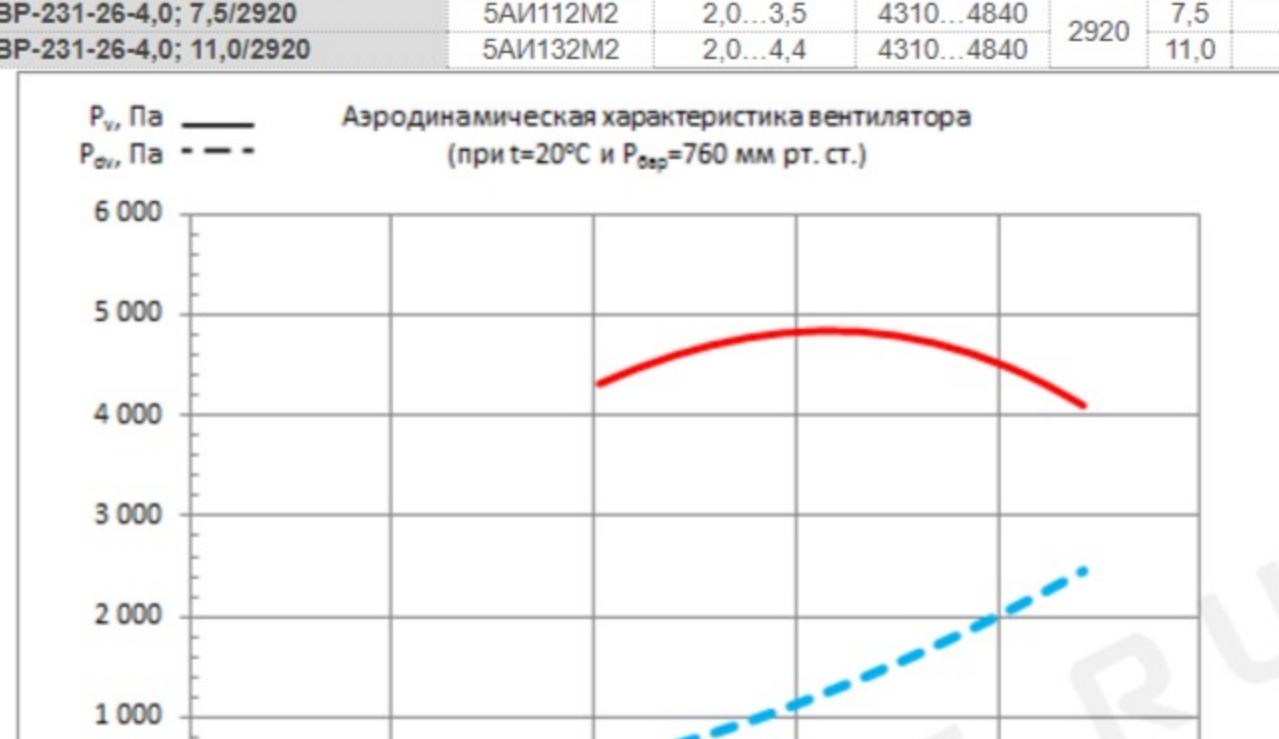

BP-231-26-4,5; электродвигатель 2 полюса (3000 мин <sup>-1</sup> )							
1	BP-231-26-4,5; 11,0/2920	5AI113M2	2,9...4,2	5450...6100	2920	11,0	129
2	BP-231-26-4,5; 15,0/2920	5AI160S2	2,9...5,8	5450...6130	2920	15,0	169
3	BP-231-26-4,5; 18,5/2920	5AI160M2	2,9...6,3	5450...6130	2920	18,5	192

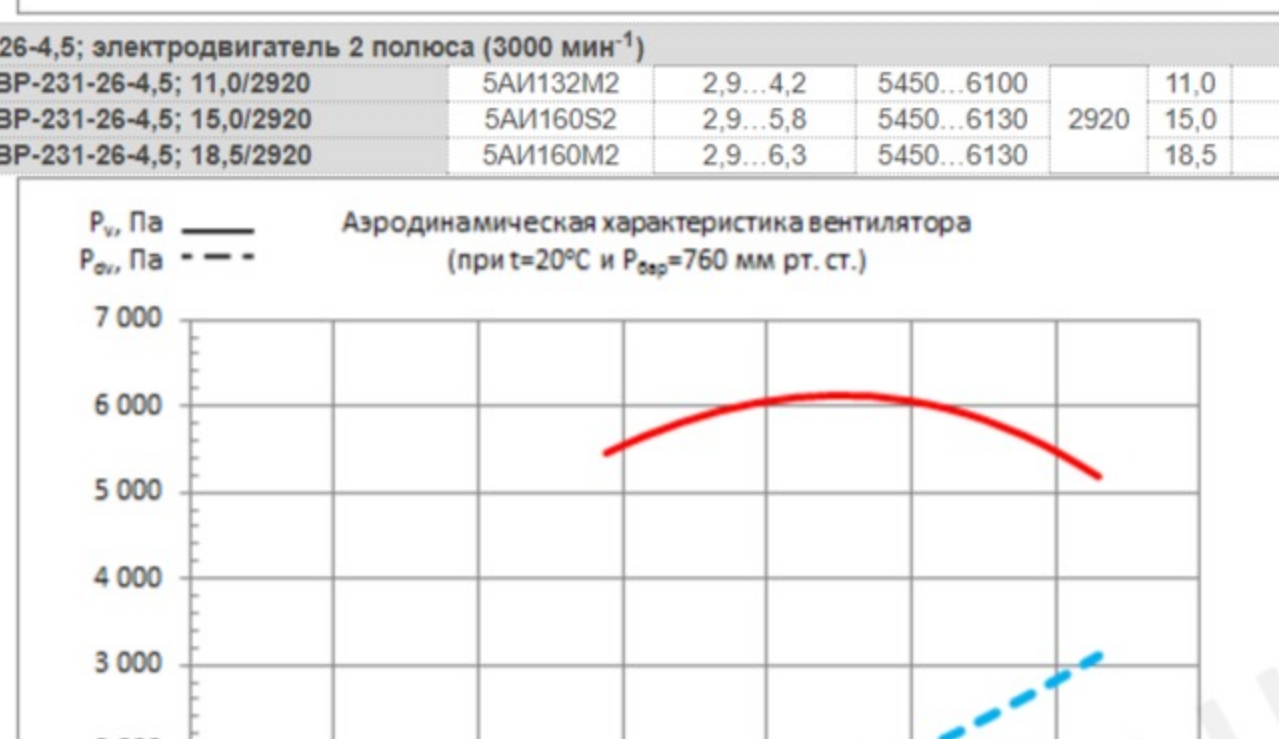

BP-231-26-5,0; электродвигатель 2 полюса (3000 мин <sup>-1</sup> )							
1	BP-231-26-5,0; 22,0/2940	5AI180S2	4,0...6,9	6830...7590	2940	22,0	230
2	BP-231-26-5,0; 30,0/2940	5AI180M2	4,0...8,7	6830...7670	2940	30,0	263

